

Pro Dash Firmware 6.0.220 Update


This update for the Pro Dash will work with the following ECUs:

- Holley EFI HP
- Holley Dominator V4, V5 and V6
- Holley Terminator X and Terminator X Max (V1 and V2)
- Holley Sniper
- Stand-alone applications.

Firmware Update Procedure

Preparation

You will need to extract the files onto the root folder of a FAT (not exFat) formatted USB memory stick. See image below, the .bin files can NOT be stored under any directory. They must be placed in the root of the “USB DRIVE”. Please ensure that you have only one .bin file on the memory stick.

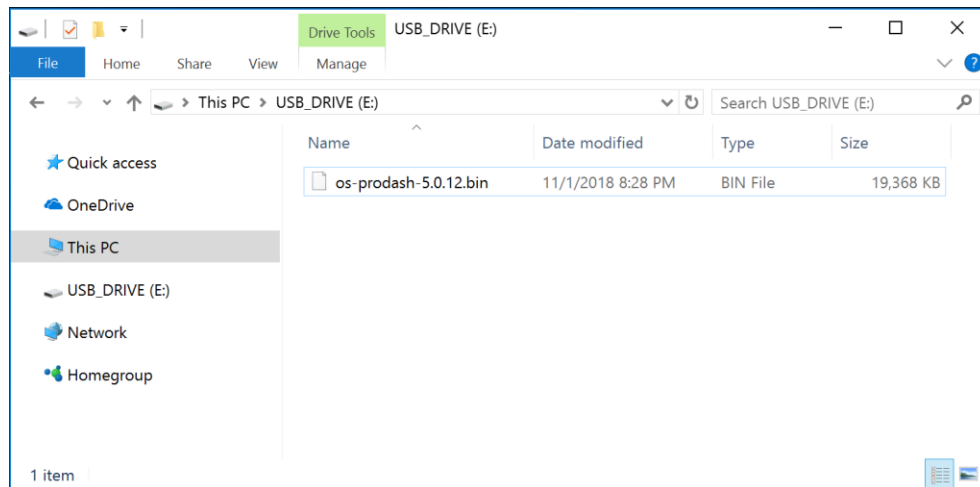

Installation Instructions

Once the update process starts, it is important to not remove power until after the update process is complete. The total process will take approximately 2 minutes.

1. Open the .zip file and copy the individual .bin file to the root folder of a USB memory stick. Ensure you eject/safely remove the USB memory stick from your computer.
2. Insert the USB memory stick into one of the USB ports on the dash
3. Power on your dash, go to the main menu, press *Configuration*, then press *Update Firmware*.
4. You may have to press OK to continue, allow the process to compete and it will power cycle the dash by itself. When it boots back up it will reprogram the coprocessor – it is important to let this complete.

NOTE: If you see the “Updating Firmware” message for more than 2 full minutes, you may power off and try again.

5. When the dash comes back online, verify the firmware update was successful. Go to the main menu, press *Configuration* and then press *About*. The top line should read:
"ProDash SW version 6.0 build 220 HW rev xx FW 45b".
6. Turn off the dash and remove the USB stick.

Note to installers:

Some units may require a second run of the updater. Click the 'About' button from the configuration menu of the dash after it powers back up to verify the firmware update has been applied, it should read "ProDash SW version 6.0 build 220 HW rev xx FW 45b".

- If you do not see the correct build number, then run the update firmware process again.
- If you see 'ffffff' at the end of the line instead of 45b, please power off and on the unit a second time and check again.

Operating Mode Verification

Once installed, go to the configuration screen and verify the Operating Mode selection matches your EFI type or Standalone for non-EFI connected operation.


Firmware Release Notes

ProDash 6.0.220

- Fixed trip odometer reset bug when car was not moved after reset.
- Update for HEFI 6.0.220 compatibility

ProDash 6.0.207

- Improved start up time by caching ECU information
- HEFI data log configuration now works with ECU output channel triggers
- Dash logging now contains internal driveshaft RPM channel
- Added momentary switch styles (small, medium & large)

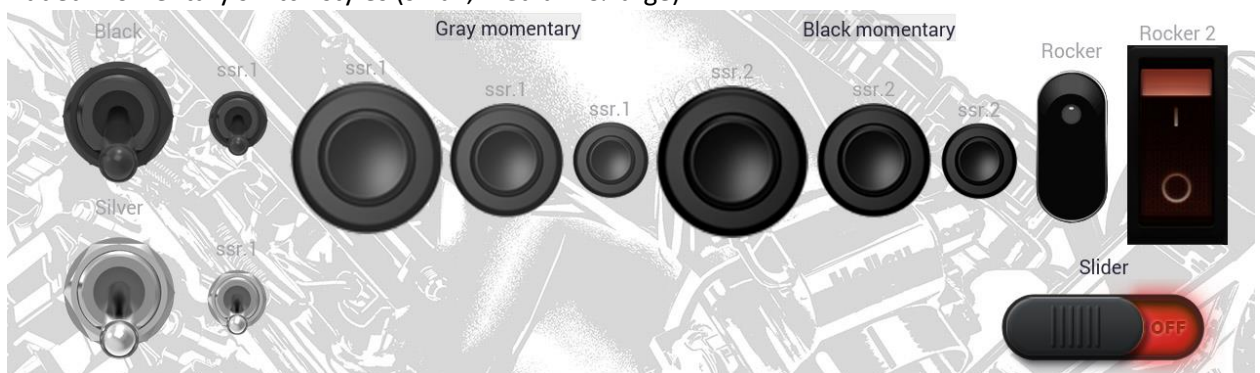

ProDash 6.0.200

- changed version/build numbering to avoid confusion

ProDash 5.0.86

- Fixed HEFI TPS Autoset error
- Fixed Status LED default alarm colors
- Fixed unresponsive UI if screen was touched outside of a message box.

ProDash 5.0.85

- HEFI V6 Water Methanol additional injection mode and extended TPS auto-set error support.

ProDash 5.0.84

- HEFI V6 Nitrous tuning issue fixed
- Local data recording in .dlz format for HEFI V6 and Terminator X V2 now supported.
- Symbol background for EFI output channel is now configurable

ProDash 5.0.82

- Fixed Terminator X V2.0 channel data

ProDash 5.0.81

- Fixed Terminator X V2.0 local data log record format.

ProDash 5.0.80

- Internal database update

ProDash 5.0.79

- Fixed broadcast in HEFI and TerminatorX modes

ProDash 5.0.77 Firmware Update

Core improvements

- New message appears to inform user to reboot for setting to take effect (when certain dash settings are changed)
- Fixed updater clearing shift light to defaults
- Screen and mouse swipes now more responsive
- tweaked RTC customize parameters
- Security menu cancel automatically locks security again.
- Odometer TRIP1, TRIP2 added
- New Driveshaft RPM channel if one of the inputs is set to Vehicle Speed
- Coprocessor driver FW 045B
- Auto-restart application on fault

Operational Changes

- Note: SSR1 output still has a ~500mS pulse on power up
- Added gauge fallback mode to simplistic gauges when a htt is not found for a product.
- HDL log fragment support, currently set to roll into a new log file every 30 minutes
- Standalone default layouts tweaked, turn signals fixed
- Fixed soft switches with connected HEFI

UI improvements

- File browser move file function added
- Fixed digital gauge contrast in warning zone
- Symbol widget now shows error color if status is fatal
- Fixed displayed channel name on symbol gauge edit
- Fixed modality of backup/restore progress indicators and messages
- Fixed units for local I/O channels
- Gauge averaging mode changes now work properly without restart
- Dash Configuration: Error message if more than Engine RPM channel is configured.

Prodash 5.0.58 Firmware Update

- Updater no longer renames firmware update file with 'installed-' prefix, permitting the same USB stick to update multiple units.
- Cleaned up calibration curve table in dash configuration
- Added 90 ohm fuel gauge sensor type
- Fixed 5V pressure sensor calculations
- Fixed scaling of pressure and other 5v sensor types.
- Updated security lock/unlock dialog
- HDL log mode verified with HEFI, TermX and Sniper, Standalone
- Local playback mode works with either HDL or DLZ files. Note: forward/rewind only works with HDL files
- Local sensor broadcast if configured in TermX IO structure
- Gauge values font size updated

ProDash 5.0.54b Firmware Update

Core improvements

- New coprocessor firmware and driver, local inputs are read at up to 100Hz rate
- Gyro channels operational
- Records data logs in 'Holley Data Log' (HDL) format. Use the new Holley Next-Gen Log Viewer application to view.
- HDL filenames are of the form *sssss_nnnn.hdl*, where S is the serial number and N is an incrementing count from 0000-9999 with wrap around
- Datalog playback now has forward/reverse function
- Local speed3 / speed4 inputs now operational
- Supports EGT 8ch in standalone mode
- Gui speed improvements

Operational Changes

- "RPM" mode in a local channel now gives a real revolutions per minute (i.e., not divided by number of cylinders).

- “Engine RPM” mode is the only one that uses number of cylinders in the calculation, and will override the main gauge RPM channel.

UI improvements

- Cleaned up look/feel of dialogs, blur feature on background
- Graph widget now has minor ticks implemented.
- Analog gauges: Additional border styles available: Black, Grey and Silver. These are shown in the *Customize gauge* dialog under ‘Border Style’. Default border style for new gauges is ‘Black’



Figure 1 – Grey



Figure 2 - Black



Figure 3 - Silver

- New Odometer preset function available in Utilities | Service menu
- Added drop-down sensor selection for analog inputs:

Local I/O		CAN1 Devices	Plugins	Vehicle	Misc
Name	Type	Pin	Notes		
IO1 io.1	Holley 200psi (554-103)	18	io.1		
IO2 io.2	(disabled)	27			
IO3 io.3	Custom 5V	19			
IO4 io.4	Holley 50psig	28			
IO5 io.5	Holley 100psi (554-102)	20			
IO6 io.6	Holley 200psi (554-103)	29			
	Holley 500psi (554-136)				
	Holley 1600psi (554-104)				
	Holley 3000psi (554-137)				
	100psi Oil Pres				
	GM LSx Oil Pressure				

Ok Cancel

Holley 50psig
 Holley 100psi (554-102)
 Holley 200psi (554-103)
 Holley 500psi (554-136)
 Holley 1600psi (554-104)
 Holley 3000psi
 100psi Oil Pressure (overrides oil pressure)
 GM LSx Oil Pressure (overrides oil pressure channel)
 Racepak 200C IR temperature
 Racepak Laser Height
 Holley 30amp Sensor (554-170)
 Holley 50amp Sensor (554-171)

Holley 200amp Sensor (554-171)
Holley 350amp Sensor (554-170)
Holley 1bar (538-24)
Holley 2bar (538-13)
Holley 3bar (554-107)
Holley 3.5bar SS (554-134)
Holley 5bar SS (554-108)
GM LSx MAP (overrides MAP channel)
Holley CTS
GM LSx CTS
Custom CTS
Holley MAT
Custom MAT
Custom Ohms
Custom 5V

- New Bargraph Style 2 widget, allows control over both width and height of the bar. Minor Ticks are viewable as bars between legend values

